

Amplifiers

Mixing Amplifiers

PA-948

Order No. 17.5070




Mono PA mixing amplifier

- 1 x 480 W
- 4 balanced microphone inputs and line inputs with selectable priority
- 4 stereo line inputs
- Speaker outputs via screw terminals
- Balanced line output
- Record output
- Insert facility, e.g. for effect units, equalizers, feedback controllers
- 2-tone or 4-tone chime, can be activated externally
- Input level control and output level control
- 2-way tone control for the output
- Switchable 48 V phantom power for microphone inputs

- Temperature-controlled fan
- Mains operation or 24 V emergency power operation
- Removable mounting brackets



Model	PA-948
Peak music power output	680 W
Power rating	480 W
Inputs	2.5-100 mV (mic), 350 mV (line)
Frequency range	50-16,000 Hz
Equalizer bass	± 10 dB/100 Hz
Equalizer treble	± 10 dB/10 kHz
S/N ratio	> 75 dB
THD	< 0.1%
Power supply	~ 230 V/50 Hz/1,090 VA, = 24 V/27 A
Dimensions	482 x 137 x 395 mm, 3 RS
Weight	19 kg

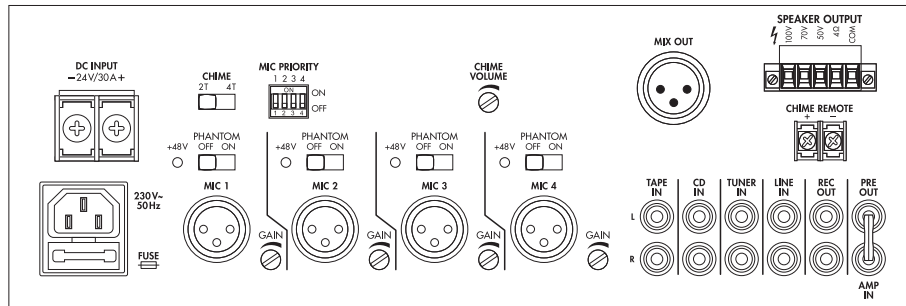

PA-924

Order No. 17.5060



Mono PA mixing amplifier

- 1 x 240 W
- 4 balanced microphone inputs and line inputs with selectable priority
- 4 stereo line inputs
- Speaker outputs via screw terminals
- Balanced line output
- Record output
- Insert facility, e.g. for effect units, equalizers, feedback controllers
- 2-tone or 4-tone chime, can be activated externally
- Input level control and output level control
- 2-way tone control for the output
- Switchable 48 V phantom power for microphone inputs
- Temperature-controlled fan

- Mains operation or 24 V emergency power operation
- Removable mounting brackets



Model	PA-924
Peak music power output	340 W
Power rating	240 W
Inputs	2.5-100 mV (mic), 350 mV (line)
Frequency range	50-16,000 Hz
Equalizer bass	± 10 dB/100 Hz
Equalizer treble	± 10 dB/10 kHz
S/N ratio	> 75 dB
THD	< 0.1%
Power supply	~ 230 V/50 Hz/640 VA, = 24 V/18 A
Dimensions	482 x 95 x 390 mm, 2 RS
Weight	13 kg

