

EDL-70/WS


Order No. 16.3310

100V

PA ceiling speaker, with special 2-step mounting.

- 100 V line technique
- Snap-in mounting
- For a ceiling thickness from 2 to 45 mm
- Full range speaker with a clear voice reproduction
- Wide frequency range
- Robust metal version (basket and protective grille)

Model	EDL-70/WS
Frequency range	90-20,000 Hz
Power rating (RMS)	6/3/1,5 W
Sensitivity	97 dB/W/m
Mounting cutout	Ø 195 mm
Dimensions	Ø 220 mm x 104 mm
Weight	1 kg

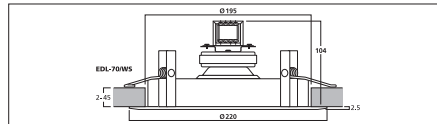

EDL-8


Order No. 16.1070

100V

PA ceiling speaker

- 100 V line technique
- 20 cm (8") full range speaker
- Plastic housing with protective metal grille
- For a ceiling thickness from 10 to 43 mm

Model	EDL-8
Frequency range	50-18,000 Hz
Power rating (RMS)	10/6/4/2 W
Sensitivity	92 dB/W/m
Mounting cutout	Ø 220 mm
Dimensions	Ø 252 mm x 80 mm
Weight	1 kg

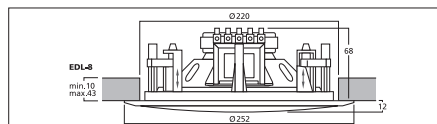

EDL-150/WS

Order No. 16.1220

100V

PA ceiling speaker

- 100 V line technique via audio transformer with 5 power taps
- Full range speaker with dual cone
- Metal housing with white, fixed protective metal grille

Model	EDL-150/WS
Frequency range	100-12,000 Hz
Power rating (RMS)	10/5/2.5/1.25/0.625 W
Sensitivity	89 dB/W/m
Mounting cutout	Ø 120 mm
Dimensions	Ø 150 mm x 86 mm
Weight	709 g

