

### EDL-10TW


Order No. 0161200



**PA ceiling speaker**, with additional integrated tweeter.

- 100 V line technique
- Metal housing
- Quick-mounting facility
- For a ceiling thickness from 10 to 40 mm

Model	EDL-10TW
Frequency range	50-20,000 Hz
Power rating (RMS)	10/6/4/2 W
Sensitivity	95 dB/W/m
Mounting cutout	Ø 235 mm
Dimensions	Ø 262 mm x 101 mm
Weight	1.5 kg

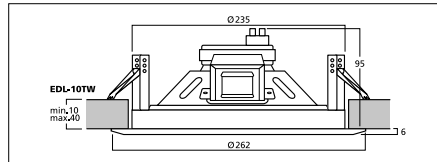

### EDL-68/WS


Order No. 0162340



**PA ceiling speaker**, with special 2-step mounting.

- 100 V line technique
- Snap-in mounting
- For a ceiling thickness from 1 to 30 mm
- 2-way coaxial speaker
- Wide frequency range
- Robust metal version (basket and protective grille)
- Speaker additionally secured by a safety rope

Model	EDL-68/WS
Frequency range	100-19,000 Hz
Power rating (RMS)	6/3 W
Sensitivity	97 dB/W/m
Mounting cutout	Ø 200 mm
Dimensions	Ø 220 mm x 65 mm
Weight	1.22 kg

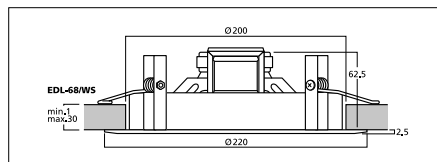

### EDL-158

Order No. 0162930



### EDL-156

Order No. 0161910



### EDL-155


Order No. 0162920



**Weatherproof PA ceiling speakers**, heat-resistant up to 100 °C. For applications in saunas and swimming pool areas.

- 100 V line technique
- 2-way system with dome tweeter
- Excellent sound
- White plastic housing
- Weatherproof speaker cone
- Tested according to ASTM B117 (400 h salt spray test)
- For a ceiling thickness from 2 to 25 mm

Model	EDL-158	EDL-156	EDL-155
Frequency range	50-16,000 Hz	60-20,000 Hz	70-18,000 Hz
Power rating (RMS)	15/10/5/2.5/1.25 W	15/10/5/2.5/1.25 W	15/10/5/2.5/1.25 W
Sensitivity	89 dB/W/m	88 dB/W/m	87 dB/W/m
Mounting cutout	Ø 220 mm	Ø 190 mm	Ø 170 mm
Dimensions	Ø 250 mm x 96 mm	Ø 226 mm x 100 mm	Ø 202 mm x 100 mm
Weight	1.12 kg	1.1 kg	1.05 kg

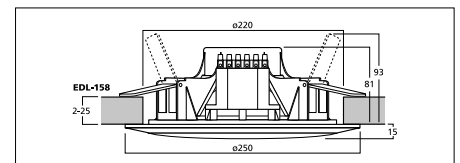

### EDL-65TW

Order No. 0162220



**Movable PA ceiling speaker**

- 100 V line technique
- High power rating with 30 W max.
- High-quality 2-way coaxial speaker system with 2-way crossover network
- Complete speaker part can be moved for optimising the sound radiation pattern indoors
- Plastic housing of superior design with metal grille
- Plastic material of ABS and self-extinguishing according to UL 94V-0
- For a ceiling thickness from 9 to 35 mm

Model	EDL-65TW
Frequency range	50-20,000 Hz
Power rating (RMS)	30/15/7.5 W
Sensitivity	91 dB/W/m
Mounting cutout	Ø 260 mm
Dimensions	Ø 280 mm x 175 mm
Weight	2.38 kg

