

# Speakers

## Wall and Ceiling Speakers

### SPE-82HQ

Order No. 0105770



### SPE-62HQ

Order No. 0105760




#### Hi-fi wall and ceiling speaker

- 2-way version with coaxial dome tweeter
- 20 cm (8") bass speaker with waveguide and 25 mm (1") silk dome
- Tweeter movable via ball joint
- Excellent sound characteristics
- Stylish flush fit protective metal grille with slim plastic frame
- Protective grille magnetically attached to the speaker front
- For a wall thickness/ceiling thickness from 6 to 35 mm



| Model                         | SPE-82HQ          | SPE-62HQ         |
|-------------------------------|-------------------|------------------|
| Frequency range               | 30-20,000 Hz      | 50-20,000 Hz     |
| Resonant frequency (fs)       | 40 Hz             | 60 Hz            |
| Power rating (RMS)            | 50 W              | 35 W             |
| Peak music power output (MAX) | 100 W             | 70 W             |
| Sensitivity                   | 89 dB/W/m         | 89 dB/W/m        |
| Mounting cutout               | Ø 252 mm          | Ø 210 mm         |
| Dimensions                    | Ø 295 mm x 100 mm | Ø 250 mm x 98 mm |
| Weight                        | 1.8 kg            | 1.54 kg          |

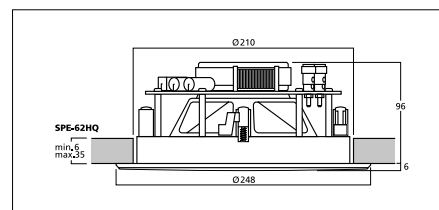

### SPE-802HQ

Order No. 0105790



### SPE-602HQ

Order No. 0105780




#### Hi-fi wall and ceiling speaker

- 2-way version with dome tweeter
- 20 cm (8") bass speaker and 25 mm (1") silk dome with waveguide
- Excellent sound characteristics
- Protective metal grille
- Protective grille magnetically attached to the speaker front
- Adjustable tweeter level  $\pm 3.0$  dB
- For a wall thickness/ceiling thickness from 6 to 35 mm



| Model                         | SPE-802HQ         | SPE-602HQ         |
|-------------------------------|-------------------|-------------------|
| Frequency range               | 30-20,000 Hz      | 50-20,000 Hz      |
| Resonant frequency (fs)       | 40 Hz             | 60 Hz             |
| Power rating (RMS)            | 50 W              | 35 W              |
| Peak music power output (MAX) | 100 W             | 70 W              |
| Sensitivity                   | 89 dB/W/m         | 89 dB/W/m         |
| Mounting cutout               | 329 x 236 mm      | 264 x 180 mm      |
| Dimensions                    | 357 x 264 x 92 mm | 289 x 205 x 85 mm |
| Weight                        | 2.1 kg            | 1.65 kg           |

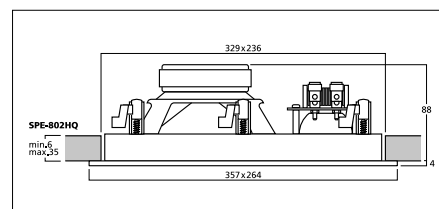


### SPE-252HQ

Order No. 0105800



#### Hi-fi wall and ceiling speaker, 50 W, 8 Ω

- 2-way version with dual bass speaker and dome tweeter
- 2 x 13 cm (5") bass speaker and 25 mm (1") silk dome
- Excellent sound characteristics
- Protective metal grille
- Protective grille magnetically attached to the speaker front
- Ideally suited e.g. as a centre speaker
- For a wall thickness/ceiling thickness from 6 to 35 mm

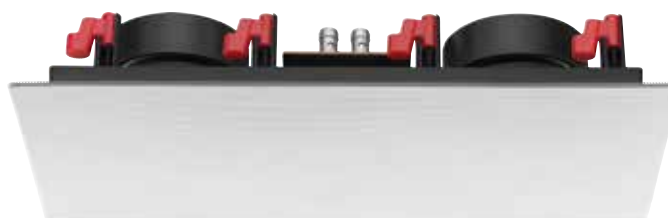

| Model                         | SPE-252HQ         |
|-------------------------------|-------------------|
| Frequency range               | 60-20,000 Hz      |
| Resonant frequency (fs)       | 65 Hz             |
| Power rating (RMS)            | 50 W              |
| Peak music power output (MAX) | 100 W             |
| Sensitivity                   | 88 dB/W/m         |
| Mounting cutout               | 365 x 157 mm      |
| Dimensions                    | 391 x 183 x 75 mm |
| Weight                        | 2.6 kg            |

