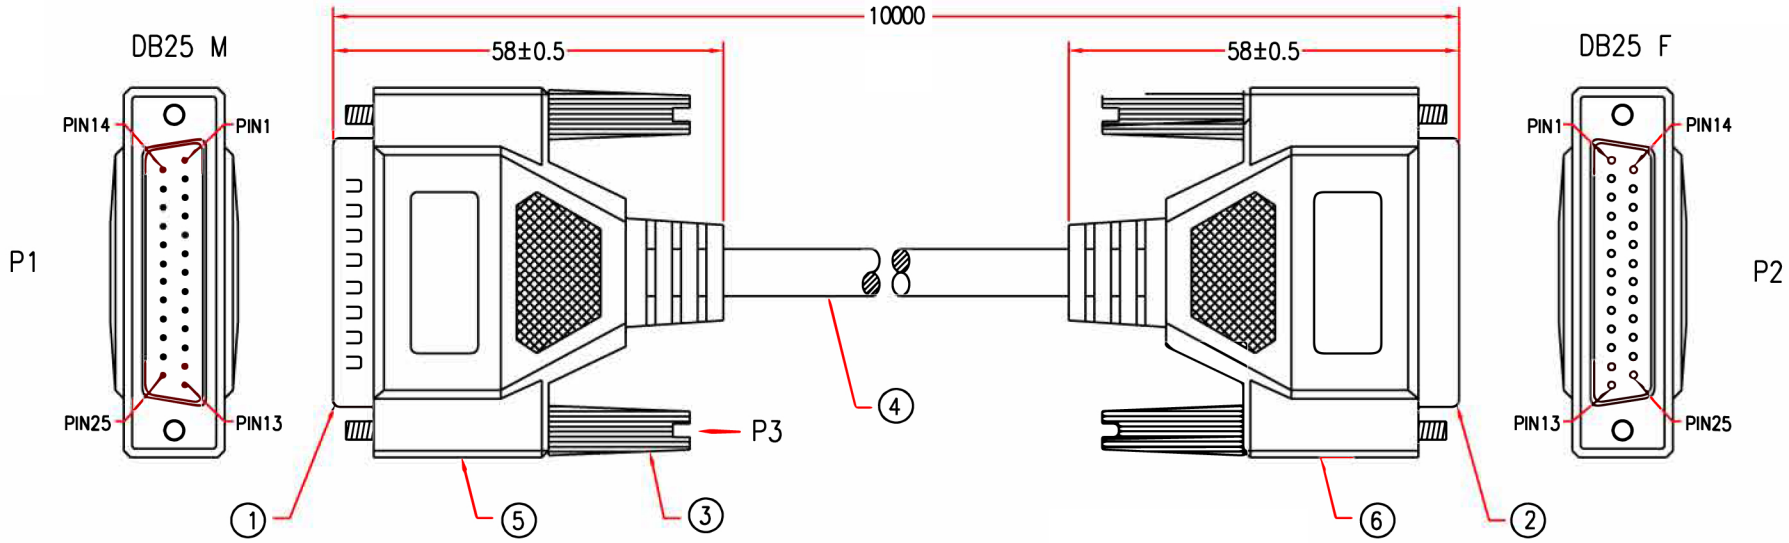

P1	P2		P1	P2	
1	1	BROWN	14	14	BROWN/BLACK
2	2	RED	15	15	RED/BLACK
3	3	ORANGE	16	16	ORANGE/BLACK
4	4	PINK	17	17	PINK/BLACK
5	5	YELLOW	18	18	YELLOW/BLACK
6	6	GREEN	19	19	GREEN/BLACK
7	7	LIGHT GREEN	20	20	LIGHT GREEN/BLACK
8	8	BLUE	21	21	BLUE/BLACK
9	9	LIGHT BLUE	22	22	LIGHT BLUE/BLACK
10	10	PURPLE	23	23	PURPLE/BLACK
11	11	GREY	24	24	GREY/BLACK
12	12	WHITE	25	25	WHITE/BLACK
13	13	BLACK	SHIELD	SHIELD	

No.	DESCRIPTION	Q'TY	
5&6	BLACK PVC TUBE ø3.0*30mm	2	
	ALUMINUM FOIL 33*110mm	2	
	MOLDED PE COLOR TRANSPARENT		
	MOLDED PVC BEIGE		
4	NON-UL 25C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 7.0mm, JACKET BEIGE, DRAWING No. EMAL2825C-095	L	
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	4	
2	DB25 FEMALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR	1	
1	DB25 MALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR	1	

PART NO.		Revision:	
APPROVED			
CHECKED			
DRAWING			
DATE	14.12.17	ITEM NO.	

Cable Length Unless Other Spec. Tolerances:

0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm

UNIT:mm

CHECKED