DMX Connection Cables

For transmitting digital DMX512 signals or AES/EBU signals.

- Fitted with NEUTRIK XLR plug NC-3MX and NEUTRIK XLR inline jack NC-3FX
- 2 x 0.22 mm²
- Double shielding
- Outside diameter: Ø 4.5 mm
- Impedance level: 110 Ω
- Very low capacitance: 57 pF/m

Model	Order No.	Length
CDMXN-150/SW	0112110	1.5 m
CDMXN-300/SW	0112120	3 m
CDMXN-500/SW	0112130	5 m
CDMXN-1000/SW	0112100	10 m

MSC-1007/SW

Order No. 0062650

Speaker cable

- 1 x XLR plug and 1 x XLR inline jack
- Cores: 2 x 1.5 mm²
- Length: 10 m
- Without shielding

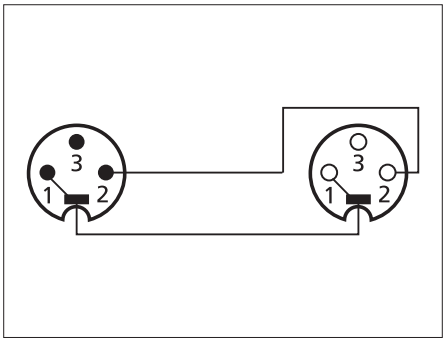

MSCP-1000/SW

Order No. 0062450

Speaker cable

- 1 x XLR plug and 1 x 6.3 mm plug
- Cores: 2 x 1.5 mm²
- Length: 10 m
- Without shielding

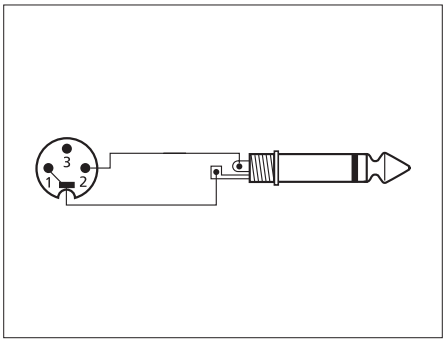

Speaker Cables

- Fitted with 6.3 mm plug
- Different lengths
- Without shielding

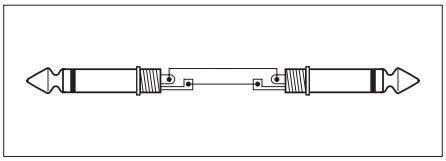

Model	Order No.	Length	Colour	Internal conductor
MSC-150/SW	0060930	1.5 m	black	2 x 1.5 mm²
MSC-300/SW	0060960	3 m	black	2 x 1.5 mm²
MSC-600/SW	0062500	6 m	black	2 x 1.5 mm²
MSC-1000/SW	0062490	10 m	black	2 x 1.5 mm²
MSC-1500/SW	0060940	15 m	black	2 x 1.5 mm²

Speaker Cables

"HIGHLY FLEXIBLE"

- Fitted with NEUTRIK SPEAKON plug NL-2FX and 6.3 mm mono plug
- Highly flexible cable material

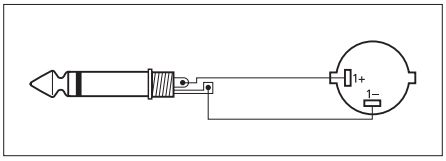

Model	Order No.	Length	Colour	Internal conductor
MSCN-8050/SW	0129380	5 m	black	2 x 1.5 mm²
MSCN-8100/SW	0129390	10 m	black	2 x 1.5 mm²
MSCN-8150/SW	0129400	15 m	black	2 x 1.5 mm²

Full specifications can be found on our website www.img-stageline.com