

CLASSIC LINE

PA-914D

Order No. 1000143

482mm 19" PASCAL 100V 8Ω NEW

PA-928D

Order No. 1000146

482mm 19" PASCAL 100V 8Ω NEW


PA-9100D

Order No. 1000149

482mm 19" PASCAL 100V 4Ω 8Ω NEW

Mono class D PA mixing amplifier

- 1 x 140 W (PA-914D)
- 1 x 280 W (PA-928D)
- 1 x 1,000 W (PA-9100D)
- Class D concept with PASCAL amplifier module
- Energy-efficient concept due to high efficiency
- Lightweight design due to compact switch-mode power supply
- Silent operation due to fanless cooling concept
- 4 balanced mic/line inputs
- Mic 1 with priority circuit and automatic talkover
- Additional connection for desktop microphone via screw terminal
- 1 aux input
- Speaker outputs via screw terminals
- Line output
- Insert facility, e.g. for effect units, equalizers, feedback controllers
- Input level control and output level control
- 2-way tone control for the output
- 48 V phantom power for each microphone input, to be activated individually
- Limiter switch: 8 Ω/100 V
- Removable mounting brackets

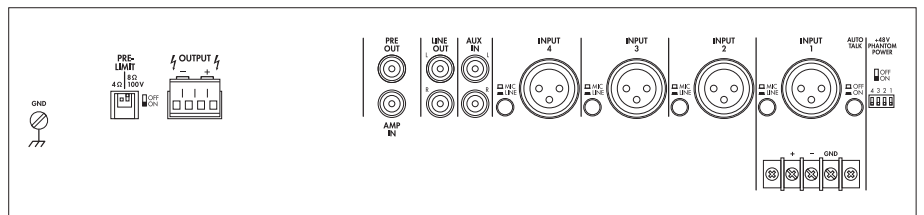

Model	PA-914D	PA-928D	PA-9100D
Power rating	140 W	280 W	1,000 W
Power rating at 8 Ω	140 W	280 W	1,000 W
Power rating at 100 V	140 W/66 Ω	280 W/33 Ω	1000 W/9.2 Ω
Output impedance	8 Ω	8 Ω	4-8 Ω
Inputs	3 mV (mic), 200 mV (line), 140 mV (aux)	3 mV (mic), 200 mV (line), 140 mV (aux)	3 mV (mic), 200 mV (line), 140 mV (aux)
Frequency range	20-20,000 Hz	20-20,000 Hz	20-20,000 Hz
Equalizer bass	± 10 dB/100 Hz	± 10 dB/100 Hz	± 10 dB/100 Hz
Equalizer treble	± 10 dB/10 kHz	± 10 dB/10 kHz	± 10 dB/10 kHz
S/N ratio	> 80 dB	> 80 dB	> 80 dB
THD	< 0.1%	< 0.1%	< 0.1%
Power supply	~ 90-230 V/50-60 Hz/160 VA	~ 90-230 V/50-60 Hz/300 VA	~ 90-230 V/50-60 Hz/1,100 VA
Dimensions	482 x 88 x 275 mm, 2 RS	482 x 88 x 275 mm, 2 RS	482 x 88 x 275 mm, 2 RS
Weight	5 kg	5 kg	5.3 kg

PA-948

Order No. 0175070


482mm 19" 100V 4Ω 8Ω 16Ω

Mono PA mixing amplifier

- 1 x 480 W
- 4 balanced microphone inputs and line inputs with selectable priority
- 4 stereo line inputs
- Speaker outputs via screw terminals
- Balanced line output
- Record output
- Insert facility, e.g. for effect units, equalizers, feedback controllers
- 2-tone or 4-tone chime, can be activated externally
- Input level control and output level control
- 2-way tone control for the output
- Switchable 48 V phantom power for microphone inputs



- Temperature-controlled fan
- Mains operation or 24 V emergency power operation
- Removable mounting brackets

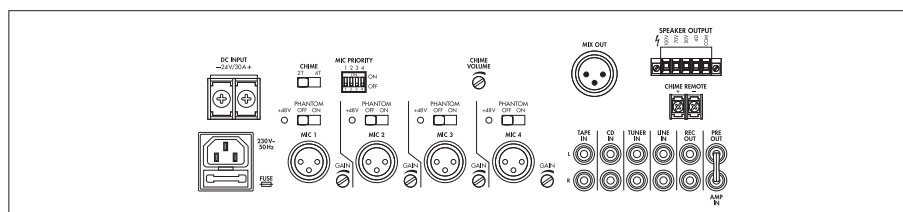

Model	PA-948
Peak output power	680 W
Power rating	480 W
Inputs	2.5-100 mV (mic), 350 mV (line)
Frequency range	50-16,000 Hz
Equalizer bass	± 10 dB/100 Hz
Equalizer treble	± 10 dB/10 kHz
S/N ratio	> 75 dB
THD	< 0.1%
Power supply	~ 230 V/50 Hz/1,090 VA, = 24 V/27 A
Dimensions	482 x 137 x 395 mm, 3 RS
Weight	19 kg