

## DH-95N

Order No. 0230030

## DH-95NP

Order No. 0234100

### Dynamic hand-held microphones

- Low impedance
- With push-to-talk button
- Particularly suitable for CB and PA
- Supplied with microphone holder
- 300-6,000 Hz, 2.5 mV/Pa/1 kHz, 500 Ω

**DH-95N:** helix connection cable with open cable ends


**DH-95NP:** helix connection cable with 6.3 mm stereo plug



## Speaker Cables

"TOP QUALITY, HIGHLY FLEXIBLE"

- 100 m reel
- Suitable for stage applications as well as for 100 V line technique
- Metre marking

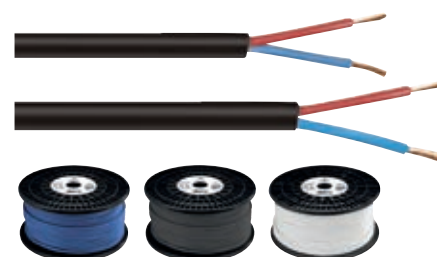

Model	Order No.	Colour	Cable diameter	Internal conductor
SPC-515/BL	0129680	blue	Ø 7.4 mm	2 x 1.5 mm <sup>2</sup>
SPC-515/SW	0129690	black	Ø 7.4 mm	2 x 1.5 mm <sup>2</sup>
SPC-515/WS	0129700	white	Ø 7.4 mm	2 x 1.5 mm <sup>2</sup>
SPC-525/SW	0129710	black	Ø 8.2 mm	2 x 2.5 mm <sup>2</sup>


## CAT-7100A

Order No. 0068900

100m

### Cat. 7<sub>A</sub> installation cable, multiple shield., S/FTP

- 100 m, shrink-wrapped coil
- 10 Gbps, 1,000 MHz
- Conductor pairs in metal foil (PiMF), complies with EIA/TIA 568
- Overall braided shield
- Cable specification: 4x2xAWG 23
- Outside diameter: Ø 7.50 mm

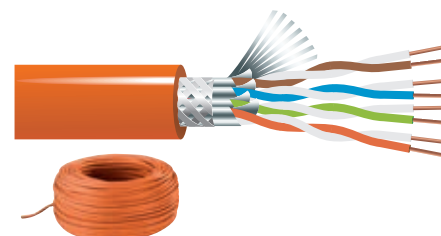


## Signal Cables

For alarm, PA and communication technology.

- 100 m coil
- Type J-Y(St)Y acc. to VDE 0815
- Copper index: 21 kg/km
- Common foil shield
- Copper wires with coloured insulation

100m

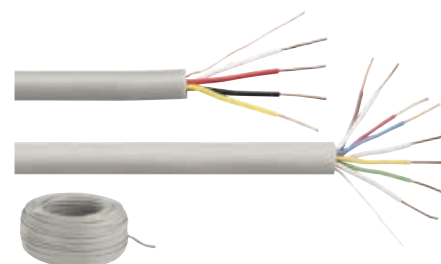

Model	Order No.	Length	Colour	Cable diameter	Internal conductor
JYSTY-2208	0111340	100 m	grey	Ø 7 mm	4 x Ø 0.8 mm, 0.5 mm <sup>2</sup>
JYSTY-2206	0192310	100 m	grey	Ø 5.5 mm	4 x Ø 0.6 mm, 0.28 mm <sup>2</sup>