

Speakers

Flush-mount Speakers

EDL-620EN

Order No. 0163180



EDL-612EN

Order No. 0163170



EDL-606EN

Order No. 0163160




PA ceiling speakers, with EN 54-24 certification.

- 100 V line technique with 3 power taps
- Full range speaker with optimised voice reproduction
- Plastic cover with low mounting depth
- For a ceiling thickness from 5 to 22 mm
- Quick installation
- Robust metal basket and protective grille



| Model | EDL-620EN | EDL-612EN | EDL-606EN |
|--------------------|------------------|------------------|------------------|
| Frequency range | 120-15,000 Hz | 120-15,000 Hz | 120-15,000 Hz |
| Power rating (RMS) | 20/10/5 W | 12/6/3 W | 6/3/1.5 W |
| Sensitivity | 93 dB/W/m | 93 dB/W/m | 93 dB/W/m |
| Mounting cutout | Ø 180 mm | Ø 180 mm | Ø 180 mm |
| Dimensions | Ø 200 mm x 70 mm | Ø 200 mm x 70 mm | Ø 200 mm x 70 mm |
| Weight | 1.1 kg | 950 g | 880 g |

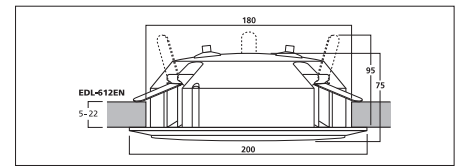

EDL-620

Order No. 0162590



EDL-612

Order No. 0161810




EDL-606

Order No. 0161800




PA ceiling speakers

- 100 V line technique via audio transformer with power taps
- For a ceiling thickness from 5 to 22 mm
- Full range speaker, type 165
- A more powerful reproduction of the range of fundamental notes
- Robust metal version (basket and protective grille)

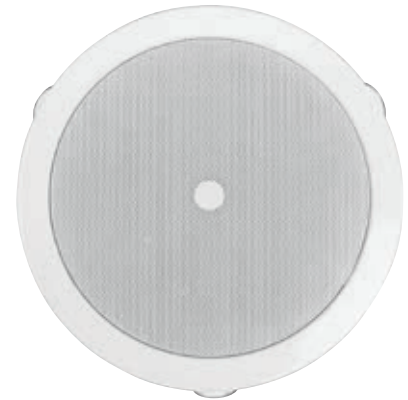

| Model | EDL-620 | EDL-612 | EDL-606 |
|--------------------|------------------|------------------|------------------|
| Frequency range | 100-20,000 Hz | 100-20,000 Hz | 100-20,000 Hz |
| Power rating (RMS) | 20/10/5 W | 12/6/3 W | 6/3/1.5 W |
| Sensitivity | 93 dB/W/m | 92 dB/W/m | 92 dB/W/m |
| Mounting cutout | Ø 180 mm | Ø 180 mm | Ø 180 mm |
| Dimensions | Ø 200 mm x 65 mm | Ø 200 mm x 60 mm | Ø 200 mm x 60 mm |
| Weight | 900 g | 750 g | 698 g |

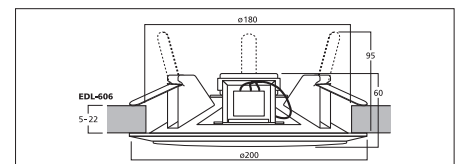

EDL-706/12

Order No. 0163370



PA ceiling speaker

- 100 V line technique via audio transformer with power taps
- For a ceiling thickness from 5 to 22 mm
- Full range speaker, type 165
- High speech intelligibility
- Robust metal version (basket and protective grille)

Supplied in packing units (PU) of 12 pcs. only



| Model | EDL-706/12 |
|--------------------|------------------|
| Frequency range | 120-17,000 Hz |
| Power rating (RMS) | 6/3/1.5 W |
| Sensitivity | 93 dB/W/m |
| Mounting cutout | Ø 170 mm |
| Dimensions | Ø 200 mm x 65 mm |
| Weight | 0.6 kg |

