

Headband Microphones and Lavalier Microphones

CM-501

Order No. 0234690

Electret lavalier microphone

- For presentations and discussions
- Good audibility, secure fit due to supplied tie clip, easy to attach
- Cardioid polar pattern
- Allows to pick up a precise voice of high quality over a wide dynamic range
- Supplied with windshield

Model	CM-501
Polar pattern	cardioid
System	electret
Audio frequency range	100-15,000 Hz
Nominal impedance	2.2 k Ω
Sensitivity	3.2 mV/Pa
Max. sound pressure	130 dB
Power supply	pocket transmitter IN/PT/UF series or PS-500
Weight	20 g
Connection	4-pole mini XLR



CM-125IB

Order No. 0235940

CM-125IF

Order No. 0235950

Electret lavalier microphones, miniature version.

- High-quality microphone cartridge with omnidirectional polar pattern
- Excellent sound characteristics
- Removable clip and 1.4 m connection cable
- 4-pole mini XLR inline jack for connection to a pocket transmitter of the IN/PT/UF series
- Beige (CM-125IF) or black (CM-125IB) version

Model	CM-125IB	CM-125IF
Polar pattern	omnidir.	omnidir.
System	electret	electret
Audio frequency range	50-18,000 Hz	50-18,000 Hz
Nominal impedance	4.4 k Ω	4.4 k Ω
Sensitivity	2.2 mV/Pa	22 mV/Pa
Max. sound pressure	130 dB	130 dB
Power supply	pocket transmitter of the IN/PT/UF series or PS-500	pocket transmitter of the IN/PT/UF series or PS-500
Weight	15 g	15 g
Connection	4-pole mini XLR	4-pole mini XLR



- Supplied with bag and windshield

801TG


Order No. 1000746



Connection cable

- Beige version
- Right-angle 3.5 mm plug
- Length: 150 cm
- Suitable for CM-801F, CM-804IF, CM-214F, CM-214ULF, CM-235IF
- Can be combined with JTS tour guide systems TG-98TA/5, TG-10T/1 and KA-10/1PACK

- Can be combined with MONACOR tour guide systems ATS-10TM, ATS-16T, ATS-20T, ATS-42T, ATS-50T, ATS-60T
- Can be combined with MONACOR WAP-8 (not compatible with ATS-22T, ATS-80T)

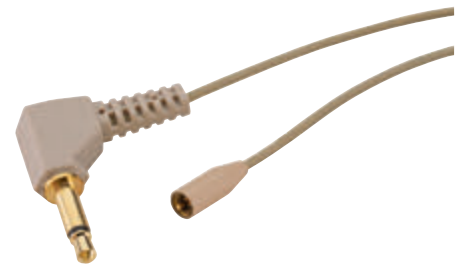

801CR

Order No. 0236530

801CR/B

Order No. 0237250

Connection cable

- Beige (801CR) or black (801CR/B) version
- 4-pole Hirose connector
- Length: 150 cm
- Suitable for CM-801F, CM-804IF, CM-214F, CM-214ULF and CM-235IF, CM-235IB



801CS

Order No. 0236110

801CS/B

Order No. 0237260

Connection cable

- Beige (801CS) or black (801CS/B) version
- Screwable 3.5 mm plug
- Length: 150 cm
- Suitable for CM-801F, CM-804IF, CM-214F, CM-214ULF and CM-235IF



801C3

Order No. 0236120

801C3/B

Order No. 0237240

Connection cable

- Beige (801C3) or black (801C3/B) version
- 3-pole mini XLR connector
- Length: 150 cm
- Suitable for CM-801F, CM-804IF, CM-214F, CM-214ULF and CM-235IF, CM-235IB



801C4

Order No. 0069240

801C4/B

Order No. 0069410

Connection cable

- Beige (801C4) or black (801C4/B) version
- 4-pole mini XLR connector
- Length: 150 cm
- Suitable for CM-801F, CM-804IF, CM-214F, CM-214ULF and CM-235IF, CM-235IB

