

# Speakers

## Speaker Systems

### PAB-12WP/SW

Order No. 0253740



#### Weatherproof high-performance PA speaker system, 200 W, 8 Ω

- 2-way bass-reflex system in an ABS cabinet
- 30 cm (12") PA bass speaker with impregnated paper cone
- 25 mm (1") horn tweeter system
- Front grille with water-repellent gauze
- Metal parts made of stainless steel
- 4 x M10 threaded insert each at the top and bottom for suspended installation
- Stand sleeve
- Ball-proof according to DIN 18032, Part 3

Model	PAB-12WP/SW
Total power rating	400 W
Power rating (RMS)	200 W
Frequency range	42-20,000 Hz
SPL	98 dB/W/m
Protection class	IP45
Admiss. ambient temp.	-10 °C to +40 °C
Dimensions	370 x 655 x 410 mm
Weight	20.32 kg
Inputs	1 x SPEAKER
Outputs	1 x SPEAKER, par. out



### PAB-8WP/WS


Order No. 0253570



#### Weatherproof high-performance PA speaker system, 120 W

- 2-way bass-reflex system in an ABS cabinet
- 100 V or 8 Ω operation, selectable
- 20 cm (8") PA bass speaker with impregnated paper cone
- 25 mm (1") horn tweeter system
- Front grille with water-repellent gauze
- Metal parts and wall bracket made of stainless steel
- Ball-proof according to DIN 18032, Part 3

Model	PAB-8WP/WS
Total power rating	240 W
Power rating (RMS)	120/60/30 W
Frequency range	48-20,000 Hz
SPL	96 dB/W/m
Protection class	IP45
Admiss. ambient temp.	-10 °C to +40 °C
Dimensions	240 x 430 x 250 mm
Weight	11.42 kg
Inputs	1 x SPEAKER, screw terminal
Outputs	1 x SPEAKER, par. out

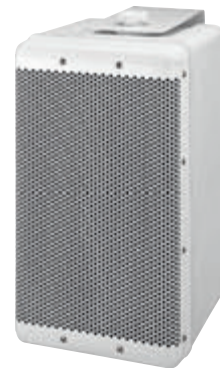

### PAB-6WP/WS

Order No. 0253560



#### Weatherproof high-performance PA speaker system, 100 W

- Compact 2-way bass-reflex system in an ABS cabinet
- 100 V or 8 Ω operation, selectable
- 16 cm bass speaker with coated carbon fibre cone
- 30 mm dome tweeter with horn front attachment
- Front grille with water-repellent gauze
- Recessed connection terminal with cover plate and high-strength cable gland
- Metal parts and wall bracket made of stainless steel
- Ball-proof according to DIN 18032, Part 3

Model	PAB-6WP/WS
Total power rating	180 W
Power rating (RMS)	100/50/25 W
Frequency range	42-19,000 Hz
SPL	90 dB/W/m
Protection class	IP45
Admiss. ambient temp.	-10 °C to +40 °C
Dimensions	200 x 370 x 240 mm
Weight	7.1 kg
Inputs	screw terminal



### PAB-68/SW

Order No. 0131930



### PAB-68/WS

Order No. 0131940



#### Pair of high-quality PA speakers, 8 Ω

- 2-way speaker system in an ABS cabinet which is both functional and at the same time of an attractive appearance, bass-reflex
- Polypropylene bass speaker and dome tweeter with horn front attachment (waveguide)
- High-quality crossover networks with perfect long-term stability, e.g. due to consistently applying film capacitors

Model	PAB-68/SW	PAB-68/WS
Total power rating	70 W	70 W
Power rating (RMS)	40 W	40 W
Frequency range	55-22,000 Hz	55-22,000 Hz
SPL	90 dB/W/m	90 dB/W/m
Dimensions	210 x 350 x 200 mm	210 x 350 x 200 mm
Weight	3.9 kg	3.9 kg
Inputs	speaker screw terminal	speaker screw terminal

- Really fast and brilliant sound of high efficiency and high dynamic range, particularly suitable for PA applications of modern music at higher volume levels
- LED at the front for indicating the level
- Supplied with wall bracket

