

EDL-70/WS


Order No. 0163310

100V

PA ceiling speaker, with special 2-step mounting.

- 100 V transmission technology
- Snap-in mounting
- For a ceiling thickness from 2 to 45 mm
- Full range speaker with a clear voice reproduction
- Wide frequency range
- Robust metal version (basket and protective grille)

Model	EDL-70/WS
Frequency range	90-20,000 Hz
Power rating (RMS)	6/3/1.5 W
SPL	97 dB/W/m
Mounting cutout	Ø 195 mm
Dimensions	Ø 220 mm x 104 mm
Colour	white, RAL 9010
Weight	1 kg

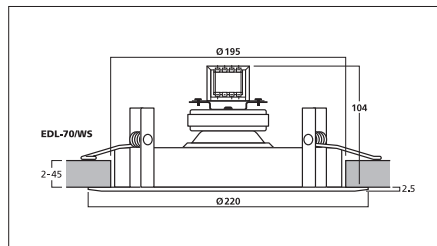

EDL-11TW


Order No. 0161210

100V

PA ceiling speaker

- 100 V transmission technology
- White metal housing
- Including fire protection cover for a high safety level
- Additional integrated tweeter
- Quick-mounting facility
- For a ceiling thickness from 3 to 20 mm

Model	EDL-11TW
Frequency range	60-20,000 Hz
Power rating (RMS)	10/5/2.5 W
SPL	97 dB/W/m
Mounting cutout	Ø 225 mm
Dimensions	Ø 264 mm x 120 mm
Colour	white
Weight	1.73 kg

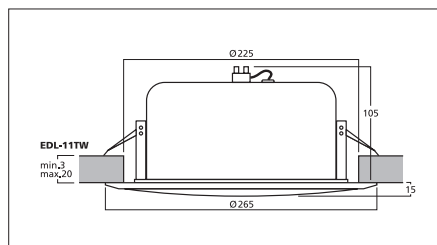

EDL-11TW/SW

Order No. 0162410

100V

PA ceiling speakers

- 100 V transmission technology
- Black metal housing
- Including fire protection cover for a high safety level
- Additional integrated tweeter
- Quick-mounting facility
- For a ceiling thickness from 3 to 20 mm

Model	EDL-11TW/SW
Frequency range	60-20,000 Hz
Power rating (RMS)	10/5/2.5 W
SPL	97 dB/W/m
Mounting cutout	Ø 225 mm
Dimensions	Ø 264 mm x 120 mm
Colour	black
Weight	1.6 kg

