

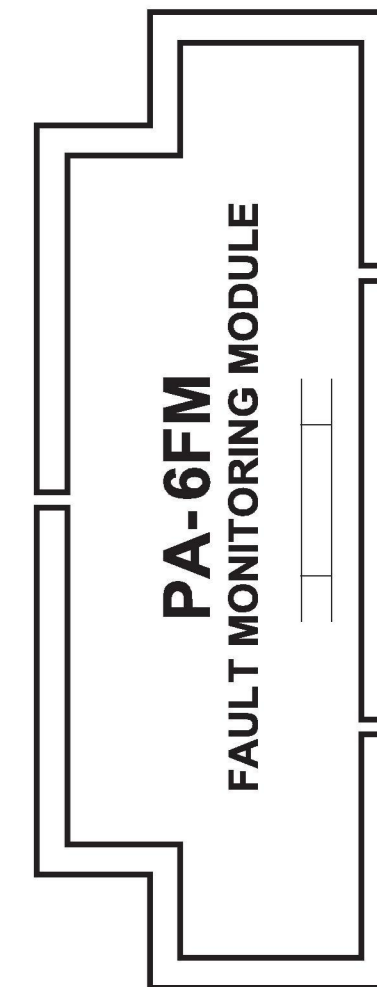


FACTORY SETTINGS "A" SPEAKER OUTPUT TABLE (INSIDE)				VOLTAGE IMPEDANCE	
SPEAKER OUTPUT SETTINGS	1	2	3	100 V	10 Ω
■ A	75 V	85 V	100 V	85 V	7.2 Ω
■ B	60 V	70 V	85 V	75 V	5.6 Ω
■ C	50 V	60 V	75 V	70 V	4.9 Ω
				60 V	3.6 Ω
				50 V	2.5 Ω

CAUTION!
PLEASE READ THE OPERATING INSTRUCTIONS!

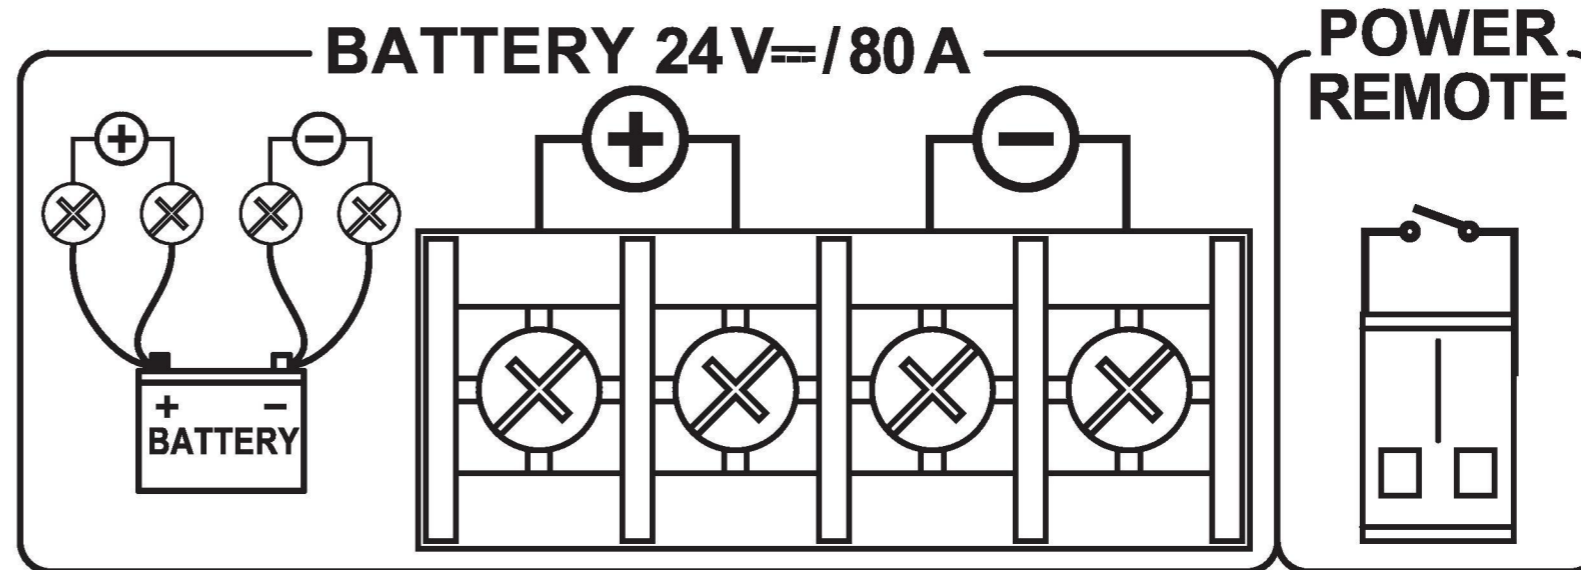

230 V~ / 50 Hz