


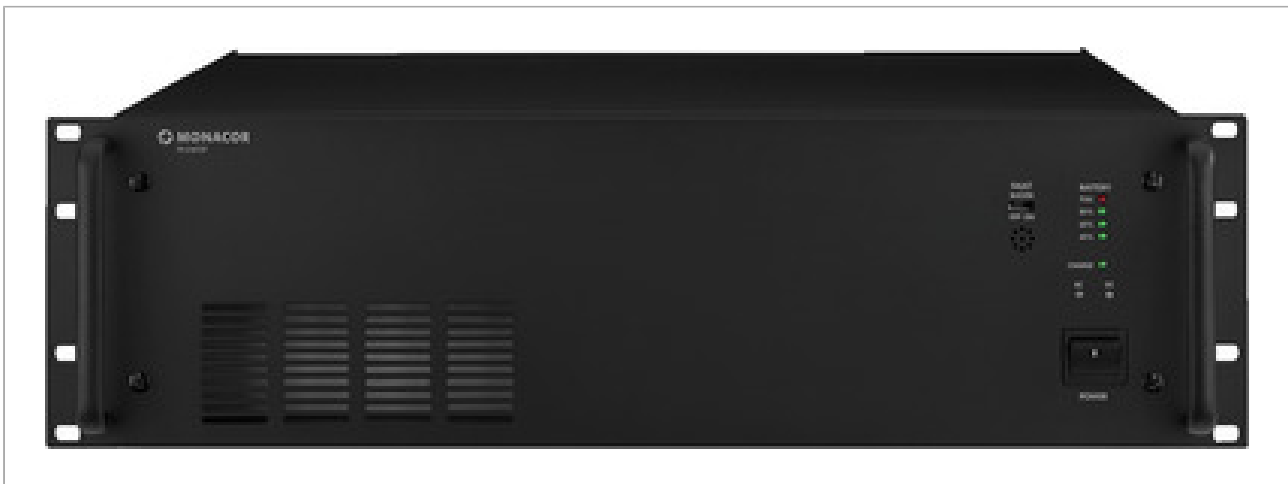

PA-24ESP

Order No.: 0243120

PRODUCTINFOS

24 V emergency power supply,

for our PA components with 24 V connection.

- Possible to install 2 x rechargeable lead battery NPA-12/24I
- Screw terminals for external 24 V rechargeable batteries
- Maximum charging current: 2.5 A
- Electronic charging control with overload protection, protection against total discharge and trickle charge
- 1 x output DC 24 V/1 A (unswitched)
- 2 x output DC 24 V/32 A
- 3 x output DC 24 V/16 A
- Power supply: ~ 230 V/50 Hz/110 VA
- Dimensions: 482 x 135 x 405 mm
- Weight: 11.7 kg

TECHNICAL SPECIFICATIONS

PA-24ESP

Description

emergency power supply

PA-24ESP

Nominal value	DC 24 V
Suitable for	PA, 24 V
Power supply	~ 230 V/50 Hz/110 VA
Admiss. ambient temp.	0-40 °C
Dimensions	482 x 135 x 405 mm
Weight	11.52 kg
Connections	screw contacts
Packing unit	1
Packing dimensions (W x H x L)	0.48 x 0.22 x 0.54 m
Gross weight	12.9 kg
Net weight	11.52 kg