


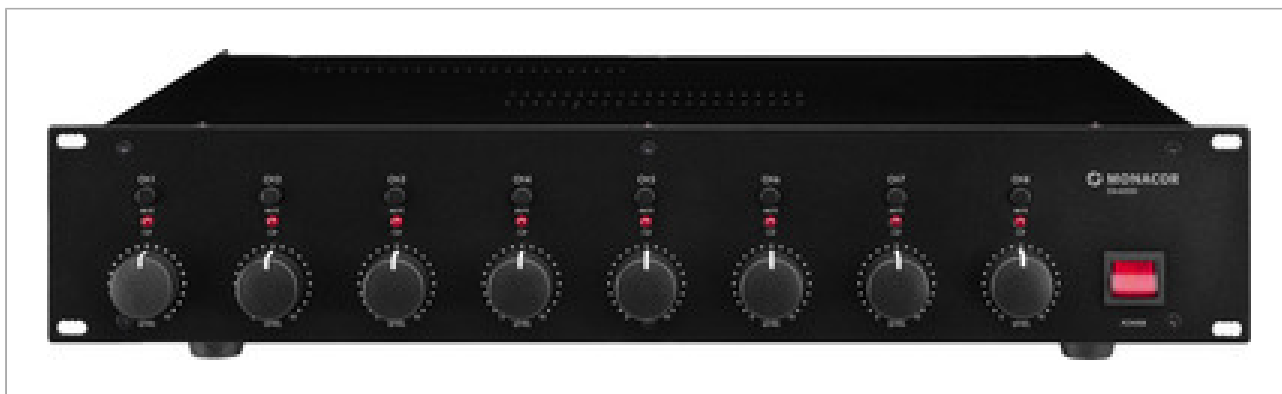

STA-850D

Order No.: 0252360

PRODUCTINFOS

8-channel class D amplifier

- Silent operation due to fanless cooling concept
- 8 Ω bridged operation possible
- Mute function for each channel
- 8 level controls
- 1 LED per channel for indicating overload (clip)
- Protected against short circuit

TECHNICAL SPECIFICATIONS

STA-850D

Peak output power	600 W
Power rating	400 W
Power rating at 4 Ω	8 x 50 W
Power rating at 8 Ω	8 x 30 W
Power rating with 8 Ω bridged operation	4 x 100 W
Channels	8
Inputs	1 V/20 k Ω unbal. 550 mV/20 k Ω bal.
Frequency range	10-20,000 Hz

STA-850D

Crosstalk attenuation	> 45 dB
Power supply	~ 230 V/50 Hz/600 VA
Mains voltage	~ 230 V
Mains frequency	50 Hz
Power consumption, operation	600 VA
Admiss. ambient temp.	0-40 °C
Width	483 mm
Height	90 mm
Depth	330 mm
Rack units, RU	2
Weight	10.5 kg
Connections	8 x XLR, bal.
	8 x RCA
	8 x spring-load. speaker term. L/R
Packing dimensions (W x H x L)	0.41 x 0.16 x 0.56 m
Gross weight	13.22 kg
Net weight	10.68 kg