

PA-812DMP

Order No. 0176930

PA-806DMP

Order No. 0176920




Mono class D PA mixing amplifier, with integrated

MP3 player, FM tuner and Bluetooth.

- 1 x 120 W (PA-812DMP)
- 1 x 60 W (PA-806DMP)
- Class D concept with high efficiency to cut energy costs
- MP3 player with USB/SD interface, FM radio, LED display, infrared remote control
- 1 balanced XLR microphone input with phantom power and priority selection for announcements
- 2 unbalanced inputs, switchable mic/line
- 2 unbalanced line inputs
- 1 emergency input
- 1 Music-On-Hold output (MOH)
- Insert facility, e.g. for effect units, equalizers, volume controls
- Speaker outputs via screw terminals
- Input level control and output level control
- 2-way tone control for the output
- LEDs for indicating operation, clipping, protect and signal level



Model	PA-812DMP	PA-806DMP
Power rating	120 W	60 W
Inputs	5-8 mV/600 Ω (mic 1-3), 150-470 mV/10 kΩ (line, unbal),	5-8 mV/600 Ω (mic 1-3), 150-470 mV/10 kΩ (line, unbal),
Frequency range	60-15,000 Hz	60-15,000 Hz
Equalizer bass	yes	yes
Equalizer treble	yes	yes
S/N ratio	72 dB (mic) 85 dB (aux)	72 dB (mic) 85 dB (line)
THD	< 0.5%	< 0.5%
Power supply	~ 230 V/50 Hz/250 VA = 24 V/8.4 A	~ 230 V/50 Hz/160 VA = 24 V/4.2 A
Dimensions	320 x 95 x 245 mm	320 x 95 x 245 mm
Weight	5 kg	4.48 kg

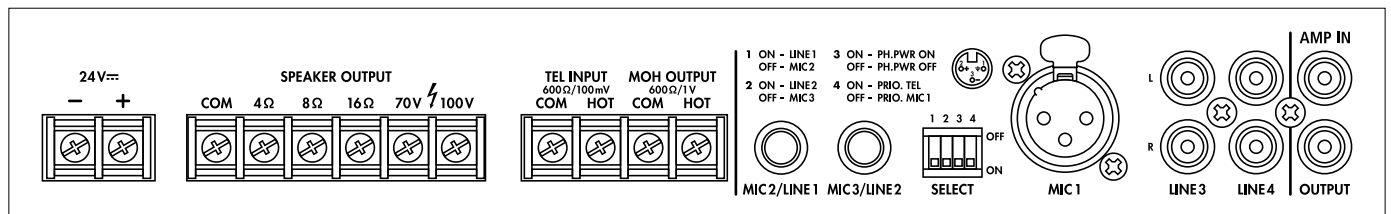

Comprehensive portfolio and perfectly matched ...

... in the **COMPONENTS catalogue 2020** from **MONACOR**.

The catalogue comprises more than 300 pages with perfectly matched accessories and electrical components – absolutely perfect for your requirements.

Come and visit our website www.monacor.com and order your own personal copy of the catalogue.



MONACOR

Ihr Projekt ist unser Projekt